

HyBrid RunneR iH1010-2S-S2


High Performance of SSD
with Large Capacity of HDD



HyBrid RunneR iH1010, an internal hybrid removable storage solution of 2.5" SSD and 3.5" HDD equipped with SATA II host interface. HyBrid iH1010 fully takes the advantages from the performance of SSD and utilizes from the beginning sectors of HDD to backup the identical data from SSD regularly, or simultaneously for the prevention of possible data loss caused by SSD failure. In addition, HyBrid iH1010 further grants the usage of remained capacity from HDD to provide sufficient extended and cost-effective storage capacity to users without any wastes.


Performance of SSD & Capacity of HDD

Fully benefits from the read/write performance of SSD which is twice faster than HDD, meanwhile obtains the advantage of large storage capacity from HDD.

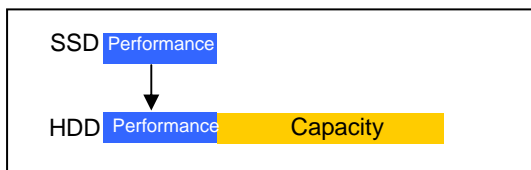


SSD Real-time Backup & Backup scheduling

HDD reserves an equivalent data space from its beginning sectors for SSD data real-time backup or backup scheduling to prevent data lost from unexpected SSD failure.

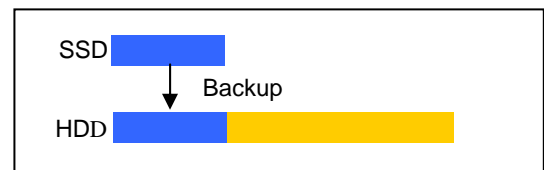


Removable SSD Design

You are able to take SSD with RAIDON J1 (USB 3.0 enclosure) with you while working on field as a portable storage to enhance performance and data mobility. Backup function will resume when the original SSD is inserted back into the iH1010 and overwrites HDD saved data from SSD to HDD.

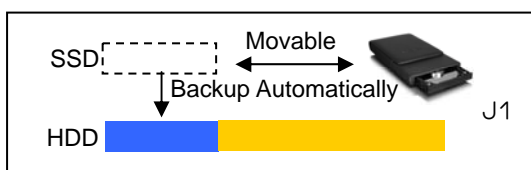

Recover to New SSD

When SSD failed unpredictably, iH1010 can easily recovers the data to the new SSD as when it is inserted and provides user a reliable and consistent operation.

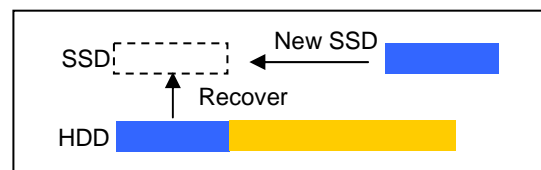

User Friendly Tray-less Design

None of the screws or tray modules required for SSD / HDD installations.



5.25" CD-ROM Form Factor

Mounting screw layouts and dimensions are identically matches a 5.25" CD-ROM Drive.



Model No.	iH1010-2S-S2
ASIC	RAIDON SR2045
Host Interface	SATA II
Transfer Rate	300MB/s
Product Function	HyBrid
Support Hard Drive	1x2.5" SATA SSD & 1x3.5" SATA HDD
Support Single HDD	Based on SSD & HDD
Maximum Capacity	Based on SSD & HDD
Maximum Total Capacity	Based on SSD & HDD
Support Hot-swap	SSD Only
LED Indicators	Power / Failure / Access / Fan Failure / Overheat
Environment Detector	Fan Failure / Overheat
Power Supply	SATA 15 Pin (DC 5V & 12V)
Cooling fan	4 cm Fan
GUI Monitoring Software	Yes (Windows Only)
Operating System	Windows / Linux
Certifications	CE & FCC
Package Content	Quick Installation Guide / CD / Accessory Kit
Dimension	147W x 170L x 41H mm
Net Weight	0.77kg

The product specification is subject to change without notice.

Logistical Data			
Dimension of Article:	147W x 170L x 41H mm	Net Weight:	0.77kg
Dimension of Packing Box:	185W x 163L x 55H mm	Gross Weight (incl. packing):	0.82kg
Dimension/Carton:	383W x 298L x 342H mm	Total Weight:	17.2kg/ctn
Packing Unit:	20 units./carton	Country of Origin:	Taiwan
EAN-No.:	4711132863796		
UPC-No.:	884826503019		