


RAIDON

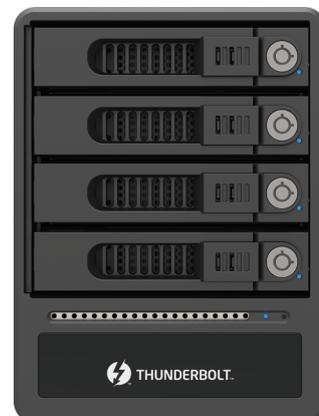

SafeTANK GR4670-TB3

4-Bay 2.5"/3.5" SAS/SATA III HDD/SSD Hardware RAID Storage

2 Thunderbolt™ 3 ports, 1 Mini DisplayPort, Hot-Swappable Drive

GR4670-TB3 is built-in the easy-to-use hardware RAID, and it won't hurt system performance during its REBUILDING WORK completely! It would meet your requirement who always requests for both of system performance and the high memory capacity. GR4670-TB3 with RAID 5 feature would be your best cost-effective storage solution at both of data protection and the system performance.


Features

1. Hardware RAID that works seamlessly between Macs and PCs.
2. The GR4670-TB3 is equipped with five configuration modes to suit every need.
 - RAID 0/1/5/10/JBOD.
3. Thunderbolt™ 3 (USB-C) brings you 40 Gbps extreme high data transfer speed.
4. GR4670-TB3 to support 4 x 3.5" / 2.5" SAS/SATA HDD/SSD.
5. MCU function provides automatic and manual adjustment of FAN.
6. Thunderbolt™ 3 The USB-C that does it all.
 - Support 15W (5V/3A) Power Delivering.
 - Mini DisplayPort connect DVI \ HDMI \ VGA display devices.

RAIDON
www.raidon.com.tw



TEL : +886-2-2278-9697
FAX : +886-2-2278-9659
E-Mail : sales1@raidon.com.tw
7F-9, No.16, Lane. 609, Sec.5, Chung-Hsin Rd.,
San-Chung Dist., New Taipei City, Taiwan (R.O.C.)

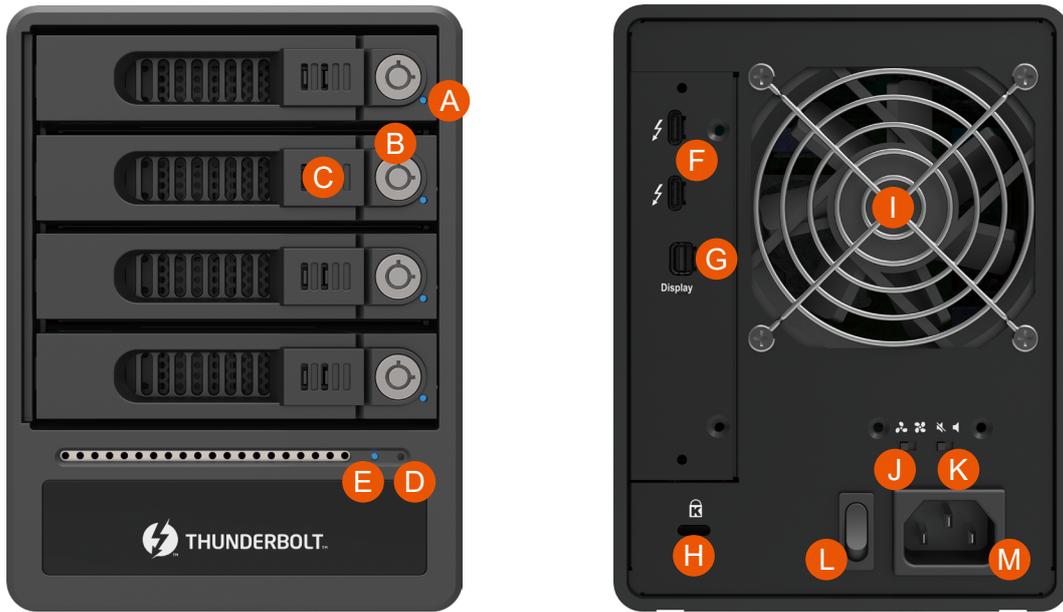

A. HDD access light
 B. HDD enclosure handle
 C. HDD enclosure keyhole
 D. Power status light
 E. System status light

F. Thunderbolt™ port
 G. Mini DisplayPort
 H. Anti-theft lock
 I. Fan
 J. Fan speed switch

K. Mute switch
 L. Power switch
 M. Power socket

Technical Specification

GR4670-TB3-B	
Interface	Thunderbolt™ 3 Port x 2(up to 40 Gbps), Support 15W (5V/3A) Power Delivering. Mini DisplayPort x 1
Compatible Drive	4 x 3.5"/2.5" SAS/SATA III HDD/SSD (up to 6 Gbps)
Certification	CE/FCC
Storage Mode	RAID 0, 1, 5, 10 and JBOD (If you need RAID 6 function, please contact sales.)
Operating System Support	Windows 7 (64-bit), Windows 10 (64-bit), macOS 10.13 and later
Cooling System	1 x 8 cm Low noise fan
Electrical and Operating Requirements	* Line voltage: 100-240V AC * Frequency: 50Hz to 60Hz, single phase * Maximum continuous power: 180W * Operating temperature: 32° to 105° F (0° to 40° C) * Storage temperature: -4° to 116° F (-20° to 47° C) * Relative humidity: 5% to 95% noncondensing
Size and Weight	124(W)×166(H)×256(L) mm, 3.585 Kg
Product Code	EAN : 4713227440257 UPC : 884826504436
Carton	4 pcs per carton
Package Accessories	* GR4670-TB3 x 1 (with removable drive tray enclosed x 4) * Thunderbolt™ 3 Cable x 1 * AC Power Cable x 1 * User Manual x 1 * Screws & Keys

