

RAIDON



SafeTANK GR8680-TB3

8-Bay 2.5"/3.5" SAS/SATA III HDD/SSD Hardware RAID Storage

2 Thunderbolt™ 3 ports, 1 Mini DisplayPort, Hot-Swappable Drive

GR8680-TB3 is built-in the easy-to-use hardware RAID, and it won't hurt system performance during its REBUILDING WORK completely! It would meet your requirement who always requests for both of system performance and the high memory capacity. GR8680-TB3 with RAID 5 feature would be your best cost-effective storage solution at both of data protection and the system performance.


Features

1. Hardware RAID that works seamlessly between Macs and PCs.
2. The GR8680-TB3 is equipped with eight configuration modes to suit every need.
 - RAID 0/1/5/6/10/50/60/JBOD.
3. Thunderbolt™ 3 (USB-C) brings you 40Gbps extreme high data transfer speed.
4. GR8680-TB3 to support 8 x 3.5" / 2.5" SAS/SATA HDD/SSD.
5. MCU function provides automatic and manual adjustment of FAN.
6. Thunderbolt™ 3 The USB-C that does it all.
 - Support 15W (5V/3A) Power Delivering.
 - Mini DisplayPort connect DVI \ HDMI \ VGA display devices.

RAIDON
www.raidon.com.tw



TEL : +886-2-2278-9697
FAX : +886-2-2278-9659
E-Mail : sales1@raidon.com.tw
7F-9, No.16, Lane. 609, Sec.5, Chung-Hsin Rd.,
San-Chung Dist., New Taipei City, Taiwan (R.O.C.)

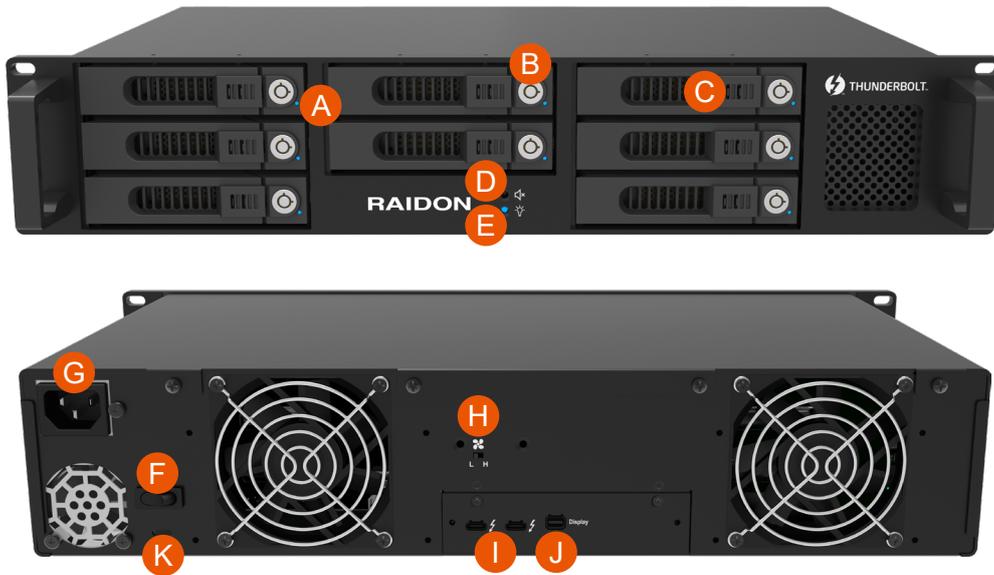

- | | | |
|---------------------------|------------------------|----------------------|
| A. HDD access light | E. System status light | I. Thunderbolt™ port |
| B. HDD enclosure key lock | F. Power switch | J. Mini DisplayPort |
| C. HDD enclosure button | G. Power socket | K. Anti-theft lock |
| D. Mute Switch | H. Fan speed switch | |

Technical Specification

GR8680-TB3	
Interface	Thunderbolt™ 3 Port x 2(up to 40 Gbps), Support 15W (5V/3A) Power Delivering. Mini DisplayPort x 1
Compatible Drive	8 x 3.5"/2.5" SAS/SATA III HDD/SSD (up to 6 Gbps)
Certification	CE/FCC
Storage Mode	RAID 0, 1, 5, 6, 10, 50, 60 and JBOD
Operating System Support	Windows 7 (64-bit), Windows 10 (64-bit), macOS 10.13 and later
Cooling System	8 cm Low noise fan x 2
Electrical and Operating Requirements	<ul style="list-style-type: none"> * Line voltage: 100-240V AC * Frequency: 50Hz to 60Hz, single phase * Maximum continuous power: 300W * Operating temperature: 32° to 104° F (0° to 40° C) * Storage temperature: -4° to 116° F (-20° to 47° C) * Relative humidity: 5% to 95% noncondensing
Size	427(W)×94(H)×244.4(L) mm
Product Code	EAN : 4713227440271 UPC : 884826504450
Carton	2 pcs per carton
Package Accessories	<ul style="list-style-type: none"> * GR8680-TB3 x 1 (with removable drive tray enclosed x 8) * Thunderbolt™ 3 Cable x 1 * AC Power Cable x 1 * User Manual x 1 * Screws & Keys

