

RAIDON



InTANK iR2622S

2 CD-ROM Bay 2 x 2.5"/3.5" HDD/SSD Internal Storage Module

Scheduling backup allows users to select the backup time freely and to extend the life usgae of hard drives

The IR2622S is the internal module, supports the 2 x 5.25" CD-ROM bay and can install the 2 x 2.5" /3.5" SATA 6G hard drives. It built in RS232 port function to monitor and transfer the status of hard disk. It can works perfectly with servers, industrial PCs and workstations.

The new design of iR2622S provides scheduling backup function. Users can use the GUI software to setup the time schedule to make the differential backup and protect the data, without worrying about the disk array corruption caused the system failure or data loss. It can also extend the life cycle of hard drives.

The scheduling backup function could improve the problem of RAID 1 that need to keeping backup all the times, may caused the 2 hard disks to be destroyed at the same time and the important data cannot be saved.

Features

1. Fit 2 x 5.25" CD-ROM Bay
2. For 2 x 3.5"/2.5" SATA III HDD/SSD
3. The Scheduling Backup can be used for immediate data recovery
4. Included software monitoring program
5. LCD display
6. Tray Module with Key-lock Design
7. Hot-Swappable drive tray



1/3/7 Days Scheduling backup

the scheduling backup of iR2622S can restore your completed data or OS immediately of pervious 1/3/7 days so that you can still work normally and efficiently.




Avoid simultaneous damage to 2 hard drives

Under RAID 1, because the hard disks of the same brand / model / capacity are used, the access time / number of times is almost the same over a long period of time. When one of them appears to be in the same state, the other one is also likely to have problems. At the same time or another problem occurs during the rebuilding process, the data will be lost.




iR2622




iR2622S

Data poisoning in RAID 1



iR2622




iR2622S



Back up your hard drive data now

Just set to the off state, you can manually start data backup.



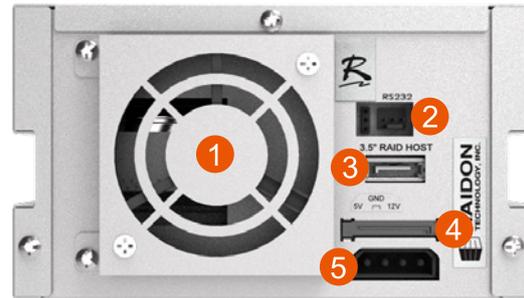

- | | |
|------------------------------|-------------------------|
| 1. LCD Display | 5. Mute Button |
| 2. LED of failure Alarm | 6. Removable drive tray |
| 3. Pri. HDD status indicator | 7. HDD tray key lock |
| 4. Sec. HDD status indicator | 8. HDD Access |

- | |
|---------------------------|
| 1. Fan |
| 2. RS232 Port |
| 3. SATA Port |
| 4. 15 PIN Power Connector |
| 5. 4Pin Power Connector |

Technical Specification

iR2622S	
Interface	1 x SATA III (6Gbps) Port
Compatible Drive	2 x 3.5" /2.5" SATA III (6.0 Gbits) HDD/SSD
Storage Level	Scheduling Backup (off, 1/3/7 days)
Certification	CE/FCC
Operating System Support	Windows 7 or above
Electrical and Operating Requirements	<ul style="list-style-type: none"> • Line voltage: 12V + 5V DC • Operating temperature: 32° to 104° F (0° to 40° C) • Storage temperature: -4° to 116° F (-20° to 47° C) • Relative humidity: 5% to 95% non-condensing
Size	Height : 85 mm Width : 146 mm Depth : 202 mm
Product Code	EAN : 4713227440752 UPC : 884826505310
Carton	8 pcs per carton
Package Accessories	<ul style="list-style-type: none"> • iR2622S x 1 (with 3.5"/2.5" removable drive tray enclosed x 2) • SATA Cable x 1 • Quick Installation Guide x 1 • Screws & Keys

